


ES_40A



ES_30A



ES_24A

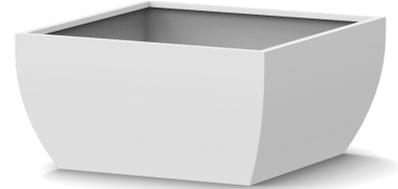

ES_24.2A



ES_24.3A



ES_18A



ES_14A



ES_14.2A

CONSTRUCTION

1. The Essentials Series Aluminum Powder Coated Planters are constructed of ASTM B-209 5052-H32 grade Aluminum. Planters are fabricated using a .125 thickness.

2. Planters are coated with an exterior grade polyester powder coat finish, available in standard stock and non-standard stock RAL colors. Marine grade finish can be provided for an upcharge per unit.

3. Planters are manufactured with standard 1", 1.5", or 2" drain holes or no drain holes. Quantity and placement as directed by Purchaser. Holes are cut to nominal O.D. for standard PVC pipe trade sizes.

STANDARD SELECTIONS

1. Standard lip = 1.5" wide lip x 1" return.

CUSTOMIZATION

1. The Essentials Series Aluminum Powder Coated Planters can be specified in customized sizes. Sizes must specify LxWxH dimensions for fabrication.

POWDER COAT FINISH

(Reference Form & Fiber Metal Finishes sheet)

ESSENTIALS SERIES ALUMINUM POWDER COATED STANDARD SIZES

| PRODUCT ID | LENGTH | WIDTH | HEIGHT | THICKNESS | AVG. WT. |
|------------|--------|-------|--------|-----------|----------|
| ES_40A | 26" | 26" | 40" | 0.125 | 52 lbs |
| ES_30A | 30" | 30" | 30" | 0.125 | 45 lbs |
| ES_24A | 48" | 24" | 24" | 0.125 | 46 lbs |
| ES_24.2A | 48" | 48" | 24" | 0.125 | 72 lbs |
| ES_24.3A | 60" | 24" | 24" | 0.125 | 56 lbs |
| ES_18A | 30" | 30" | 18" | 0.125 | 31 lbs |
| ES_14A | 42" | 42" | 14" | 0.125 | 44 lbs |
| ES_14.2A | 26" | 26" | 14" | 0.125 | 22 lbs |